



**CHINA FOCUS INDUSTRIAL LTD**


[www.led-lighting-manufacturers.com](http://www.led-lighting-manufacturers.com)

Tel:+86-755-29563861 Fax:+86-755-29563860

## **Mesh colorful LED backdrop**


**--25mm,31.25mm**

### **Module photo:**

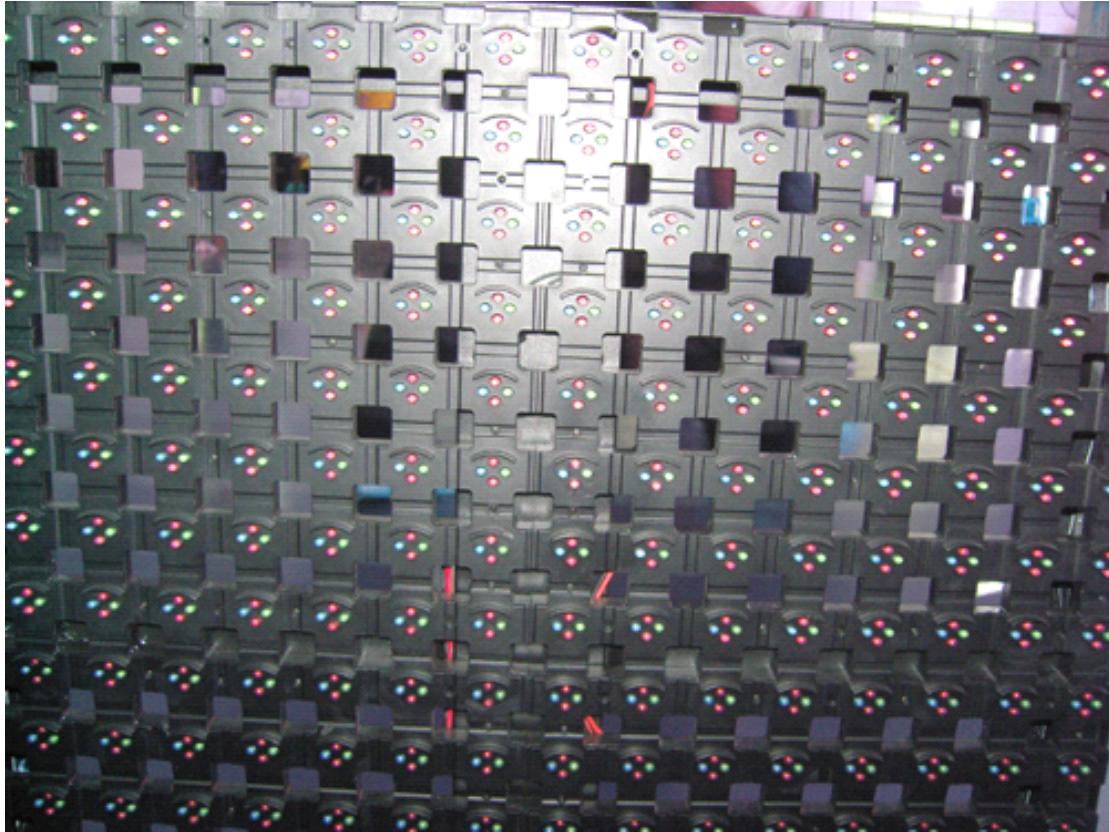

### **Cabinet photos:**

Face size

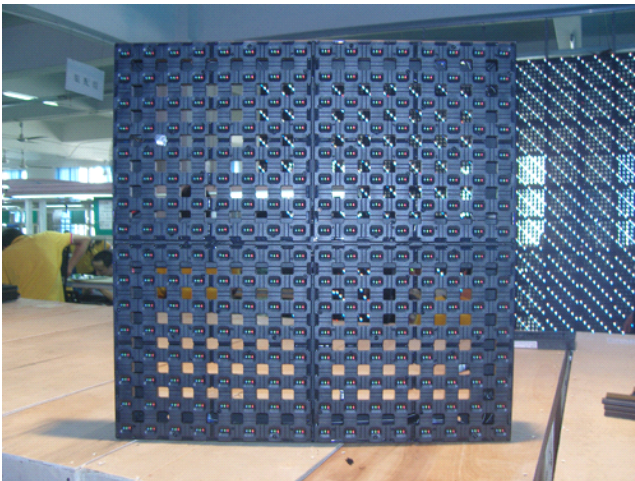

Back size





**CHINA FOCUS INDUSTRIAL LTD**

[www.led-lighting-manufacturers.com](http://www.led-lighting-manufacturers.com)

Tel:+86-755-29563861 Fax:+86-755-29563860

### **Advantage Features:**

1. This mesh LED is one solution for Outdoor and indoor stage .
2. Waterproof , duty proof , static proof to against raining ,storm ,strong wind,snow and other bad weather .
3. Mesh structure is very different from the normal LED display , much more safe in strong wind .
4. Light weight makes the assemblage and disassemblage more convenient and easy .





**Parameter sheet:**

No	ITMES	Dimensions	Dimensions
	<b>Pixel Pitch</b>	31.25mm	25mm
1	<b>Size</b>	Unit board: 250MM*250MM	Unit board: 200MM*200MM
		Cabinet : 500MM*500MM	Cabinet : 400MM*400MM
2	<b>weight</b>	4.8kg/cabinet	4.0kg/cabinet
3	<b>Pixel structure</b>	Unit board:8dots * 8dots	Unit board:8dots * 8dots
		Cabinet :16dots * 16dots	Cabinet :16dots * 16dots
4	<b>Best viewing distance</b>	>10m	>6m
5	<b>LED chip wave length</b>	Red :625-627.5nm	Red :625-627.5nm
		Green :470-472.5nm	Green :470-472.5nm
		Blue :525-527.5nm	Blue :525-527.5nm
6	<b>Pixel Density</b>	1024dots/m2	1600dots/m2
7	<b>Pixel configuration</b>	2R1PG1PB	2R1PG1PB
8	<b>White balance Luminance</b>	>2500cd/m <sup>2</sup>	>2800cd/m <sup>2</sup>
9	<b>Viewing Angle</b>	H:110°, V:50°	H:110°, V:50°
10	<b>Dive mode</b>	Static constant current	Static constant current
11	<b>Working Voltage</b>	AC220V/50HZ	AC220V/50HZ
12	<b>Max power consumption</b>	≤300W/m2	≤450W/m2
13	<b>Ave power consumption</b>	120W/m2	150W/m2
14	<b>Frame Frequency</b>	>60HZ	>60HZ
15	<b>Refresh Frequency</b>	300HZ	300HZ
16	<b>Life time</b>	>100,000.00H	>100,000.00H
17	<b>Continue working time</b>	>72H	>72H
18	<b>Temperature and Humidity</b>	-20°C+60°C , 0%--92%	-20°C+60°C , 0%--92%
19	<b>Luminance Abject</b>	Hand/Auto 256 grades	Hand/Auto 256 grades
20	<b>Communication Distance</b>	Netcable:>100m , Muti Fiber:>500m, Single Fiber:>10,000M	Netcable:>100m, Muti Fiber:>500m, Single Fiber:>10,000M



**CHINA FOCUS INDUSTRIAL LTD**

[www.led-lighting-manufacturers.com](http://www.led-lighting-manufacturers.com)

Tel:+86-755-29563861 Fax:+86-755-29563860

Applications:

